



On-Premises Softmount Washer-Extractors

SYA135VNO

FEATURES

- Freestanding, high spin
- Quantum Touch Control – full OPL
- Stainless steel top and anthracite front and side panel
- Stainless steel drum and tub
- Patented soap hopper
- Large drain valve (Ø 76 mm)
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading



TOUCH CONTROL OPTIONS

- Quantum Touch Control (OPL)
 - User-friendly screen with operating instructions built in as part of the control



Approach, program and running cycle screen

OPTIONS

- USB + RS485 plug
- Liquid soap connection
- Liquid soap pumps



Easy Operation



Ergonomical Construction



Large Door Opening



Low Water Consumption

On-Premises Softmount Washer-Extractors

Specifications

SYA135VNO

INNERDRUM

Capacity 1:09	kg (lb)	15 (33)
Capacity 1:10	kg (lb)	13,5 (30)
Volume	litres	135
Diameter	mm	620

DRUM SPEED

Wash	rpm	49
Extraction	rpm	1075
G-FACTOR		400

HEATING

Electricity very low-low-std-higher-special 1-2-3	kW	3--12-13,8--7-9
---------------------------------------------------	----	-----------------

Hot water	°C	90
Sound pressure level	dB (A)	< 65
Water valves connection	BSP	¾"
Water pressure	kPa	100 - 800
Rec. water pressure	kPa	300 - 500
Water inlet	l/min	20
Drain valve	outer Ø mm	76
Flow amount with drain valve	l/min	210


DIMENSIONS

Size HxWxD	mm	1245x795x935
------------	----	--------------

TRANSPORT DATA

Gross Weight	kg	275
Net Weight	kg	255
Packaging Dimension HxWxD	mm	1365x835x985

1. Control panel
2. Soap dispenser
3. Central stop button
4. Steam connection
5. Air relieve
6. Liquid soap connection
7. Recycled water inlet
8. Recycled water valve cable inlet
9. Cold water inlet, soft
10. Cold water inlet, hard
11. Electrical connection
12. Hot water inlet
13. Main switch/Field wiring terminal (NA models)
14. Heating change-over switch
15. Liquid soap pump electrical connection
16. Fuses
17. USB port - optional
18. PC programming connection
19. Discharge water cable inlet
20. Drain valve - 3 in. [76 mm]
21. Drain Valve - 1/2", applicable for wash bath sample (on request only)
22. Drain valve or recycle valve - 3 in. [76 mm] (280 L Models only)
23. Hidden USB port (under top cover) - standard

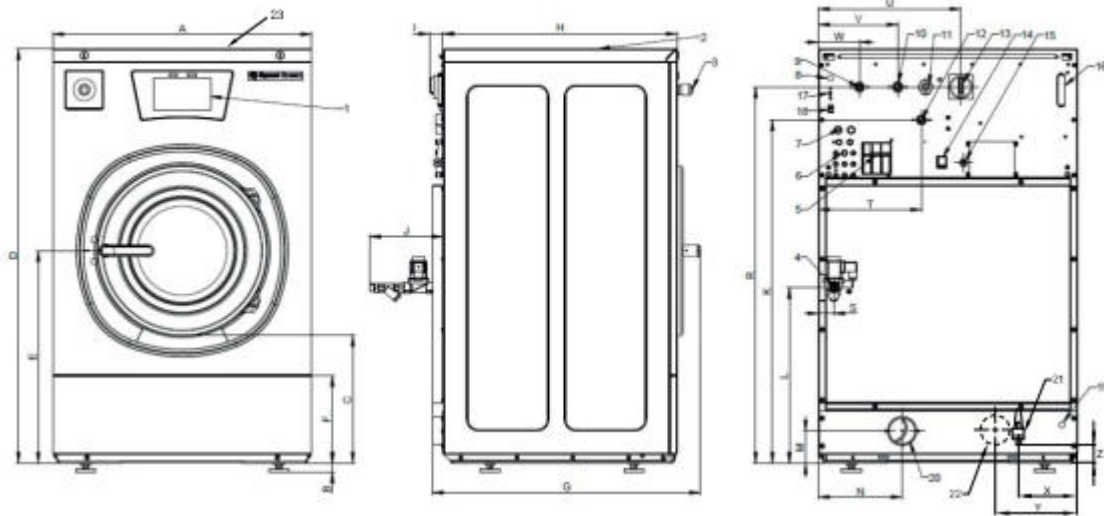

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	R	S
SY135	795	24	342	1245	617	240	935	842	48	180	1050	506	88	230	1140	42
	T	U	V	W												
SY135	293	475	218	113												

All measurements are in mm.