



On-Premises Tumble Dryers

SA035NNN - ST035ENN


Features

- Large door opening for easy loading and unloading
 - extra strong hinge and reversible door
- Galvanized drum – oval drum holes preventing damage from standard drywall screws
- Unique drum supporting system (axial airflow only)
 - at the rear: bearing
 - at the front: rubber rolls with bearings
- Large lint filter – easy removal of lint, efficient drying
- Axial airflow
 - drum perforations only at the front and back
 - maximum airflow, less energy consumption and short drying times
- Quantum™ Gold Control
 - easy to operate, easy to program
 - flexibility of 30 programmable cycles
 - moisture sensing technology prevents overdrying, saving time and energy

Options

- Reversing: prevents tangling of the linen
- CARE (Combustion Auto Response Equipped)*
 - a response to laundry combustion
 - helps suppress early laundry fire by constantly monitoring the temperature in the drum
 - in case of excessive temperature, linen is sprayed with water

* only for OPL models with gas or steam heating

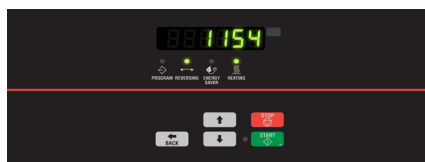

Quantum™ Gold Control



Easy Operation



Large Door
Opening



Low Energy
Consumption



High Output



On-Premises Tumble Dryers


Specifications

SA035NNN	
CAPACITY	
Capacity [kg]	16
Drum volume [l]	350
Drum diameter [mm]	Ø762
AIRFLOW	
Airflow [l/s]	280
Make Up Air (cm2)	929
DRYING AVERAGE	
Gas heating [g/min]	349
Electric heating [g/min]	340
MOTOR	
Fan [kW]	0,4
Drive [kW]	0,2
GAS HEATING	
Energy [kW]	26,4
Energy [kBTU/h]	90
Electrical connection	Single Phase 240V/50Hz / 1 Refer to Installation Guide prior to fitout
Gas connection [NPT]	½"

SA035NNN	
STEAM HEATING	
High pressure 6,9 bar [kW]	30,3
[kBTU/h]	103,4
Electrical connection	240V/50 Hz / 1
Steam connection [NPT]	¾"
ST035ENN	
Energy [kW]	24
Electrical connection	3 Phase 415V/50Hz / 3 Refer to Installation Guide prior to fitout
Breaker AMP / FLA	
Exhaust [Ø /mm]	200
DIMENSIONS	
Size H×W×D [mm]	1625×800×1155
Net weight (E) [kg]	160
Net weight (G,S) [kg]	155
TRANSPORT DATA	
Packed (foil) H×W×D [mm]	1720×840×1240
Gross weight (foil, E) [kg]	170
Gross weight (foil,G,S) [kg]	165
Packed (crate) H×W×D [mm]	2210×950×1320
Gross weight (crate, E) [kg]	230
Gross weight (crate,G,S) [kg]	220

Model	A	B	C	D	E	F	G
ST035	710	700	720	1155	1625	695	850

Refer to Installation Guide prior to fitout for Energy Safe requirements for make up air intake and the minimum required service space behind units, and space around unit. (610mm)

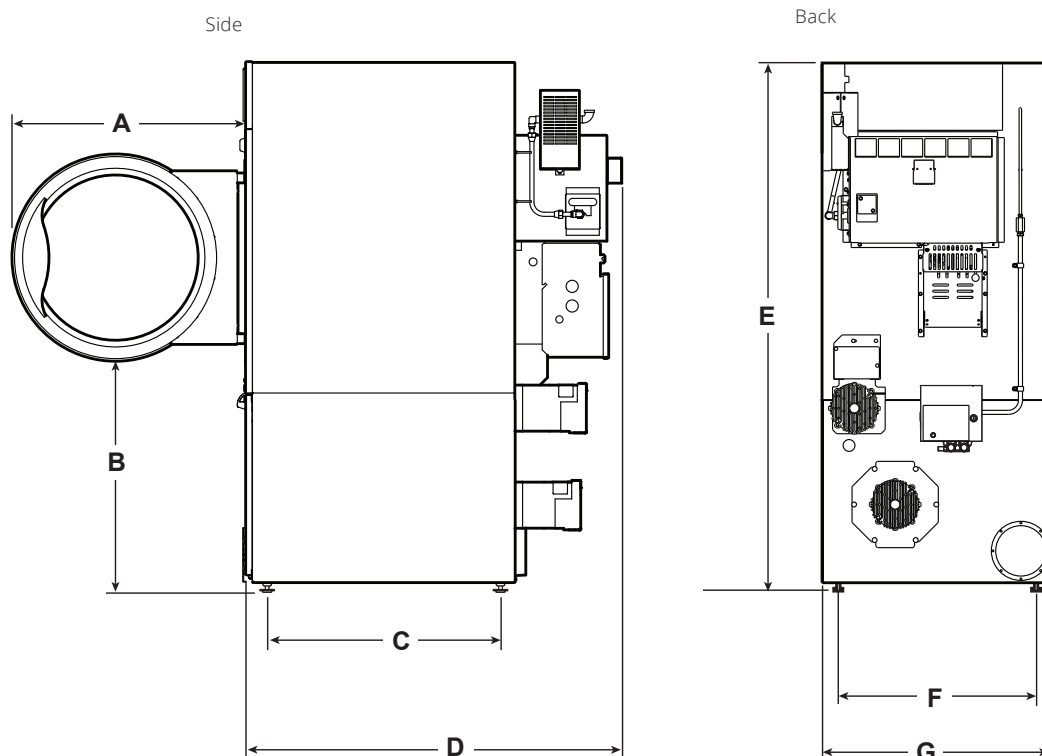

Contact Speed Queen Equipment Sales for further details:
E: info@speedqueensales.com.au